

1.800.258.9700 workplacenh.com

Configurable Workstations & Accessories





ACCESSORIES CATALOG

to customize your workplace workstations

Storage Drawers

FEATURES:

- Equipped with all steel ball-bearing drawer slides for increased precision movement and minimal sideplay. Wire pull handles of solid brass with polished chrome finish.
- All storage drawers (rated at 70 lbs max) equipped with 100% full-extension slides to provide maximum utility of valuable storage space.
- Optional drawer locks keyed to your specifications (all alike, all different, or in specified sets). Drawers ordered without locks have chromed metal plugs to allow installation of locks at a later date.
- Drawer Cases may be tiered beneath each other, on a single set of Drawer Brackets.

ORDERING INFORMATION:

- On Heavy-Duty (1000) and Lab (6600)
 Tables: Order one pair of Drawer
 Brackets per Drawer Case or per set of tiered Cases (see below).
- Brackets are not required for Standard, Packing & Shipping, Corner, Motorized or Instrument Workstations.



HI-TECH		
MODEL NO:	-SIZE/DESCRIPTION	
N3109	Drawer: 2-13/16H x 13-3/4W x 20-1/2L	
	Case: 4-1/4H x 16-3/8W x 22-1/2L	
N3110	Drawer: 5-3/4H x 13-3/4W x 20-1/2L	
	Case: 7-3/16H x 16-3/8W x 22-1/2L	
N3111	Drawer: 11-5/8H x 13-3/4W x 20-1/2L	
	Case: 13H x 16-3/8W x 22-1/2L	
N3111-FD	N3111 with File Drawer option.	
	See page 42 for complete information.	
N3113	Two 3109 Drawers in 3110 Case	
N3114	Two 3110 Drawers in 3111 Case	
N3115	One 3110/Two 3109 Drawers in 3111 Case	
N3116	Four 3109 Drawers in 3111 Case	
P2401A	Drawer Lock with 2 keys	
P2409A	Master Key	





Standard Drawer Bracket



Heavy Duty Drawer Bracket

Drawer Brackets

- Standard Brackets are recommended for light to medium weight loads.
 Specify Heavy-Duty Bracket for heavier weight loads, or when multiple Drawer Cases are tiered.
- For Lab units: Order one pair Model #3120 Brackets.

STANDARD	HEAVY-DUTY	TABLE DEPTH
BRACKETS	BRACKET	
3121	3121HD	24"
3122	3122HD	30-
3123	3123HD	36"
3120	For Lab (6600)	Tables (pair)





Pull-Out Shelf (Work Tray)

FEATURES:

- · Shelf extends from case as a flat work surface or may be inverted for use as a 1-1/2" deep work tray.
- . Drawer Cases may be tiered beneath the Pull-Out Shelf.
- · Equipped with all steel ball-bearing drawer slides for increased precision movement and minimal sideplay. Wire pull handle of solid brass with polished chrome finish.
- · Dimensions: O.D. 16-3/8"W x 22-1/2"L x 3-1/8"H I.D. 13-1/2"W x 20"L x 1-1/2"D ORDERING INSTRUCTIONS:
- · May be specified for use on all workstation styles.
- · Please specify one pair Drawer Brackets (p. 60) to mount Pull-out Shelf to Heavy-Duty and Cabinet Table Frames.

MODEL NUMBER DESCRIPTION N3142 Pull-Out Shelf (Work Tray)



Drawer Tray

FEATURES:

- · Excellent for storage of small parts, pencils, clips, etc.
- All-metal Drawer Tray slides along top edges of drawer to provide view of contents stored below.
- Increases valuable storage space; protects small items from damage.

ORDERING INFORMATION

Available in #0001 Tan finish only.

MODEL NUMBER 3128-0001

DESCRIPTION 8' wide x 1' deep



Drawer Partitions

- Drawer Partitions are designed for use in small or medium Workplace® drawers.
- · Starter Kits include: Partition Framework (1 rear/2 side frames) 3 Horizontal Channels
- 4 Small Vertical Dividers 3-3/4"L
- 4 Large Vertical Dividers 5-3/4"L
- 2 Horizontal Dividers 16"L.

MODEL NUMBER DESCRIPTION 3510 Starter Kit for 20"D Drawers 3511 Starter Kit for 26"D Drawers

Add-On Kits:

Horizonal Dividers (set of 5) 3515-5 Small Vertical Dividers (set of 10) 3516-10 Large Vertical Dividers (set of 10) 3517-10



Drawer Mats

- · Keeps tools, small items, and equipment from sliding during opening and closing of drawers.
- 1/8" thick ribbed rubber matting.

MODEL NUMBER DESCRIPTION 3520-5 Package of 5 Drawer Mats for 20-1/2°D drawers Package of 5 Drawer Mats 3521-5 for 26-1/2'D drawers





Personal Locker

FEATURES:

- · Ideal for small hand tools, parts, or personal belongings.
- · Locker suspends from open style Heavy-Duty Leg Section with upper crossmember, on outside or inside of Leg Section. Unit may also be suspended from Frame on Drawer Brackets.
- · Includes one adjustable shelf and one lock with two keys. Master key available as an option, O.D. of unit is 10"W x 14"D x 18"H.
- Door is equipped with left-hand hinge. ORDERING INFORMATION:
- · To suspend from upper crossbar of Heavy-Duty open-style Leg Section, please specify one Model #30018 Bracket.
- To mount to Heavy-Duty or Standard Frame, please order one pair of Standard Drawer Brackets (p. 60).

MODEL NUMBER N3107LH 30018

DESCRIPTION Personal Locker Leg Bracket





Single Monitor Floating Arm

FEATURES:

- Includes bracket to mount to Solid Upright (sold separately).
- Accepts VESA standard 75mm or 100mm flat-screen monitors.
- Arm extends 24" and adjusts vertically 16".
- Monitor can pivot, tilt and rotate 360°.

MODEL NUMBER 3910 DESCRIPTION

Single Monitor Floating Arm



Monitor Keyboard Floating Arm FEATURES:

- Includes bracket to mount to Solid Upright, (sold separately).
- Accepts VESA standard 75mm or 100mm flat-screen monitors.
- · Arm extends 17.5"; adjusts vertically 14"
- · Monitor can pivot, tilt and rotate 360°
- · Keyboard tray: 8"D x 27"W (with wrist rest).

MODEL NUMBER 3920

DESCRIPTION

Monitor Keyboard Floating Arm.



Dual Monitor Floating Arm

FEATURES:

- Includes bracket to mount to Solid Upright (sold separately).
- Accepts VESA standard 75mm or 100mm flat-screen monitors—max screen size 24" Arm extends 24" and adjusts vertically 16"
- Monitors pivot, tilt, and can be stacked vertically.

MODEL NUMBER

DESCRIPTION

3930

Dual Monitor Floating Arm



Dual Flat-Screen Articulating Arm FEATURES:

- Heavy-duty swivel arm with compact design to accommodate 2 monitors.
- Tilt feature allows monitors to be adjusted for operator comfort.
- Maximum screen size of 24" to accommodate both monitors.

MODEL NUMBER DESCRIPTION
3575 Dual Monitor Articulating Arm
Extra arm for additional extension capability



Single Monitor Articulating Arm FEATURES:

- Mounts to Solid Upright (sold separately).
- Accepts VESA standard 75mm or 100mm flat-screen monitors. Allows monitor to be tilted or swiveled.

MODEL NUMBER

DESCRIPTION

Articulating Arm for Flat Screen

Monitor



Articulating Arm Extension

FEATURES:

- · Provides additional 12" extension.
- Includes cable cover and rotation locking lever.

MODEL NUMBER 3590 DESCRIPTION Extra arm for additional

extension capability



Monitor Keyboard Articulating Arm FEATURES:

- Ideal solution to keep monitor, keyboard and mouse up off of worksurface.
- Accepts 75mm or 100mm VESA standard flat-panel monitors.
- 30 degree monitor tilt plus 30 degree independent keyboard adjustment.
- Monitor height adjustment of 4"; keyboard depth adjustment of 2".
- Arm extension of 25" (from mounting bracket to center of keyboard tray).
- Overall dimensions of keyboard tray: 8"D x 25"W.

MODEL NUMBER DESCRIPTION

3565 Monitor Keyboard Articulating Arm

5590 Extra arm for additional extension capability



Laptop Articulating Arm

FEATURES:

- · Mounts to Solid Upright (sold separately).
- May be used as a flat surface, or set at 3 different angles using knurled knob spring pins.
- Overall dimensions of tray surface 16"W x 11-3/4"H with 3/8" front lip.
- Two compression clips included for use with laptops up to 13"W.

MODEL NUMBER DESCRIPTION

3570 Laptop Articulating Arm

3590 Extra arm for additional extension capability



Series II Panel Riser with optional Safety Shield

Panel Riser Shelf Assembly FEATURES:

- Equipped with enclosed inner panels to create a more finished appearance.
- Optional Safety Shield available on page 64.

ORDERING INFORMATION:

- Specify Assembly length to match Table Length. Please note various styles available:
- Please specify one Insulator Kit per Fixed Riser Assembly if mounted to a table with an ESD Top.
- Deduct 2" from height for clearance under Shelf.



Series IV Panel Riser

Series I: Inner panels of vertical risers bear cutouts to accept the optional 20 Amp Powertrough.

Series II: Free of any cutouts for 20 Amp Powertrough, which cannot be installed.

Series III: Includes three 20 amp duplex outlets (on 60" & 72" lengths); two duplex on 48" length in Shelf; one duplex in left vertical riser, on/off switch and pilot light in right riser. Vertical risers bear cutouts to accept optional 20 Amp Powertrough. Requires 20-amp Power Cord.

Series IV: Same electrical features as Series III. No cutouts for optional 20 Amp Powertrough. Requires 20-Amp Power Cord.



Model 3127 Caddy

CPU Caddy

FEATURES:

 Adjustable CPU Caddy may be hung from Heavy-Duty Leg Sections with the use of the Leg Bracket, or mounted beneath most Workplace* Frames (except Packing & Shipping Station).
 Model 3127 accepts vertical CPUs from 13" to 22" high and up to 8-1/4" wide.

ORDERING INFORMATION:

MODEL NUMBER	DESCRIPTION
3127	GPU Caddy
3132LB	Leg Mount Bracket
3132-24	Frame Mount Bracket - 24'D
3132-30	Frame Mount Bracket - 30°D
3132-36	Frame Mount Bracket - 36°D
3127-LB	Lower Leg Mount Bracket
3131	Frame Mount Bracket: Motorized Wkstn




Keyboard Tray

FEATURES:

- Equipped with all steel ball-bearing drawer slides.
- Built-in 2" wide full-length padded wrist rest.
- Keyboard clearance height is 2".
 Tray accommodates keyboard of up to 13" depth x 22" length.

- Contact your Design Specialist for mounting options.
- Note: Table workheight must be at least 34" to accommodate Keyboard Tray.

MODEL NUMBER	DESCRIPTION	
3135	Keyboard	Tra

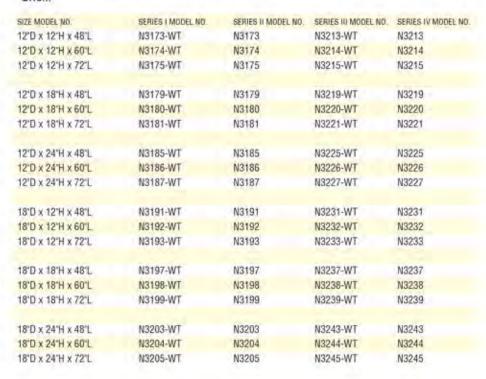



Standard Fixed Riser Assembly FEATURES:

- · Increases workstation storage space. Assembly fastens directly to worksurface.
- · Fixed Riser Assemblies may be tiered to provide additional storage space.
- · Interconnect Kits available to provide electrical connection between Fixed Riser Assemblies equipped with electricals and the optional 20 Amp Powertrough.

ORDERING INFORMATION:

- Please specify Fixed Riser Assembly length to match workstation length.
- To fasten to ESD Worksurface: Please order one Insulator Kit for each Fixed Riser Assembly. For tiered Fixed Riser Assemblies: Please specify one Kit-14A for each set of tiered assemblies.
- · Deduct 2" from height for clearance under Shelf.
- · Assemblies with duplex outlets require a 20-amp Power Cord (purchased separately).



SIZE	MODEL NUMBER WITHOUT ELECTRICS	
12°D x 12°H x 48°L	3173	3213 (2)*
12°D x 12°H x 60°L	3174	3214 (3)
12'D x 12'H x 72'L	3175	3215 (3)
12°D x 18°H x 48°L	3179	3219 (2)
12'D x 18'H x 60'L	3180	3220 (3)
12'D x 18'H x 72'L	3181	3221 (3)
12°D x 24°H x 48°L	3185	3225 (2)
12°D x 24°H x 60°L	3186	3226 (3)
12°D x 24°H x 72°L	3187	3227 (3)
18°D x 12°H x 48°L	3191	3231 (2)
18°D x 12°H x 60°L	3192	3232 (3)
18'D x 12'H x 72'L	3193	3233 (3)
18°D x 18°H x 48°L	3197	3237 (2)
18°D x 18°H x 60°L	3198	3238 (3)
18'D x 18'H x 72'L	3199	3239 (3)
18°D x 24°H x 48°L	3203	3243 (2)
18°D x 24°H x 60°L	3204	3244 (3)
18°D x 24°H x 72°L	3205	3245 (3)

MODEL	DESCRIPTION
Kit-89	Interconnect Kit - For 12'D x 12'H Riser Assembly to 20 Amp Powertrough.
Kit-90	Interconnect Kit - For 12'D x 18'H or 18'D x 12'H Riser Assembly to 20 Amp Powertrough.
Kit-91	Interconnect Kit - For 18'D x 18'H or 12'D x 24'H Riser Assembly to 20 Amp Powertrough.
Kit-92	Interconnect Kit - For 18'D x 24"H Riser Assembly to 20 Amp Powertrough.
Kit-66	Insulator Kit to mount 12°D Riser Assembly to ESD Top.
Kit-67	Insulator Kit to mount 18°D Riser Assembly to ESD Top.



Fixed Riser Safety Shield

FEATURES:

- Provides complete enclosure between worksurface and overtable shelf on Fixed Riser Assembly (p. 63-64).
- · All-metal construction allows Safety Shield to double as a magnetic "memo board".

- · Please specify height and length to match height and length of Fixed Riser Assembly.
- · Please contact factory for more information regarding use of Safety Shield with Powerstrip.

MODEL NUMBER	HEIGHT	LENGTH	
3080-12	12	48"	
3080-18	18"	48*	
3080-24	24"	48*	
3081-12	12"	60"	
3081-18	18"	60"	
3081-24	24"	60"	
3082-12	12	72*	
3082-18	181	72"	
3082-24	24"	72*	



15/20 Amp Powerstrip

FEATURES:

- Compact 2-3/8"H x 1-3/4"D design.
- Pre-wired with 15 OR 20 Amp 125V duplex outlets and combination circuit breaker, pilot light and on/off switch.
- Includes factory-installed 9 ft. Power Cord.

ORDERING INFORMATION:

- May be specified on all table series.
 Specify Powerstrip length to match length of Table.
- Powerstrip may be mounted directly to the Solid Uprights (p. 68; within a Standard Fixed Riser Shelf Assembly (p. 64); or to the rear of the Leg Sections/Cabinet (may require Wiretrough Brackets sold separately on p. 66).

MODEL	WORKSTATI	ON
NUMBER	LENGTH	DESCRIPTION
3848	48"L	Full-length 15A Powerstrip - 4 duplex
3849	48"L	Full-length 20A Powerstrip - 4 duplex
3860	60"L	Full-length 15A Powerstrip - 5 duplex
3860-50	60"L	Half-length 15A Powerstrip - 3 duplex
3861	60"L	Full-length 20A Powerstrip - 5 duplex
3861-50	60"L	Half-length 20A Powerstrip - 3 duplex
3872	72"L	Full-length 15A Powerstrip - 6 duplex
3872-50	72"L	Half-length 15A Powerstrip - 3 duplex
3873	72"L	Full-length 20A Powerstrip - 6 duplex
3873-50	72"L	Half-length 20A Powerstrip - 3 duplex
3840		Joining plate for 2 adjoining Powerstrips when bolting directly to Solid Uprights



Configurable Powertrough

FEATURES:


- Equipped with removable covers at each end where terminal blocks are wired into the circuit, so that primary entrance may be made from left or right of trough.
- · Optional data chase may be specified.
- Standard configured outlets are UL approved 20Amp /125V grounded outlets. Unique outlet configurations may be specified.
- Powertroughs may be configured with several circuit protection features such as 20Amp circuit breaker, GFI breaker, power reset switch and others.
- Standard Powertough dimensions are 4-5/8"H x 2"D.

ORDERING INFORMATION:

- May be mounted to all workstations.
 Order Powertrough to match workstation length.
- Mounting brackets may vary depending on configuration.
- Requires 20Amp Power Cord (sold separately). See page 66 to order.
- In-Line Wiring Kits are available to interconnect in-line Powertroughs.

Standard 20 Amp Powertrough

Standard 20	Amp Powertro	ugn
MODEL NUMBER	TABLE LENGTH	DESCRIPTION
3156	48°L	Powertrough with 2 Duplex Outlets
3156-3	48°L	Powertrough with 3 Duplex Outlets
3156-4	48°L	Powertrough with 4 Duplex Outlets
3157	60°L	Powertrough with 3 Duplex Outlets
3157-5	60°L	Powertrough with 5 Duplex Outlets
3157-7	60°L	Powertrough with 7 Duplex Outlets
3158	72°L	Powertrough with 3 Duplex Outlets
3158-5	72°L	Powertrough with 5 Duplex Outlets
3158-7	72°L	Powertrough with 7 Duplex Outlets
3159	48"L	Powertrough with 2 Duplex Outlets, Circuit Breaker & Pilot Light
3160	60°L	Powertrough with 3 Duplex Outlets, Circuit Breaker & Pilot Light
3161	72°L	Powerbrough with 3 Duplex Outlets, Circuit Breaker & Pilot Light
3162	48°L	Powerbough with 2 Duplex Outlets and Ground Fault System.
3163	60°L	Powertrough with 3 Duplex Outlets and Ground Fault System
3164	72°L	Powertrough with 3 Duplex Outlets and Ground Fault System



Powertrough/Powerstrip Brackets

FEATURES:

 Provides simple, convenient method of mounting Powertrough or Powerstrip to table. Brackets mount to rear of Leg Sections.

ORDERING INFORMATION:

- To mount Powertrough to a unit with Solid Uprights: Specify two Model 3167 Brackets per table, or one Bracket per Leg Section or Cabinet of an in-line row.
- To mount Wiretrough to a unit without Solid Uprights: Specify two Model 3168 Brackets per table, or one Bracket per Leg Section or Cabinet of an in-line row.
- To mount Powertrough within a Fixed Riser Assembly: Brackets are not required.
- To mount Powerstrip to a unit without Solid Uprights: Specify two Model 3168 Brackets per table, or one Bracket per Leg Section or Cabinet of an in-line row.
- 3167-01 Powertrough Brackets permit mounting of Powertrough to rear of bench (below worksurface).

MODEL NUMBER	DESCRIPTION
3167	Flat Bracket
3168	Standard Bracket
3167-01	Rear Mount Powertrough Bracket



Airtrough

FEATURES:

- Neat, compact 2"D x 2-1/4"H design.
- Equipped with brass quick disconnects.
- Inlet at rear allows quick interconnect to your air delivery system.
- Female disconnect at rear allows for efficient daisy-chaining to adjacent workstations.
- Mounts to the Solid Uprights or with the use of Powertrough Brackets (sold separately at left).
- Maximum working pressure: 125 PSI (at 73°F).

ORDERING INFORMATION:

MODEL NUMBER	DESCRIPTION
3740	For 48'L units (with 2 quick
	disconnects at front; 1 at rear)
3742	For 60'L units (with 3 quick
	disconnects at front; 1 at rear)
3744	For 72'L units (with 4 quick
	disconnects at front; 1 at rear)



Close-up view of inlet at rear


Power Cords

ORDERING INFORMATION:

 Please check wall receptacles where cords are to be used to make certain they match the NEMA configurations shown below. If they do not match, cords will not fit.

MODEL NUMBER	DESCRIPTION
3060-01	9 ft, 14 ga, 3-wire 15 amp 125V
3061-01	9 ft. 12 ga. 3-wire 20 amp 125V

* Additional cord configurations and lengths available upon request.





Light Suspension System

FEATURES:

- Positions Light Fixture (sold separately) over table to assure even light diffusion.
- May be adjusted to desired height along length of Solid Uprights.

ORDERING INFORMATION:

- Order Light Suspension size to match depth and length of Table.
- Requires Solid Uprights (sold separately on page 68).
- Light Fixtures sold separately (at right).
- For in-line use: Specify one Kit 14-B for each two abutting Light Suspension Systems.
- For Tables equipped with three Solid Uprights: Specify one #31000 bracket for each table equipped with three uprights.

MODEL NUMBER	TABLE DEPTH	TABLE LENGTH
3272	24"	48"
3273	30	48*
3274	36"	48*
3275	24'	60"
3276	30"	.601
3277	36	60°
3278	24"	72"
3279	30'	72
3280	36"	72
Kit 14-B	For adjoining in	n-line Light
	Suspension Sy	stems.
31000	Bracket to fasten Light	
	Suspension Sy	stem to third
	(center) Solid	Upright.



Light Suspension Tilt Kit

FEATURES:

- Provides more control over light source from Light Suspension System (sold separately at left).
- Extending horizontal channels allow Light Fixture to be moved closer to the front of the workstation if needed, while tilt action feature allows operator to position light to most beneficial setting:
- Control knobs allow easy repositioning.
 ORDERING INFORMATION:
- Order one Tilt Kit per Light Suspension System.

MADDEL NUMBER DESCRIPTION 1270 FIN KII





Lamp Mount Bracket FEATURES:

- Mounts to Solid Upright (sold separately).
- Screw-down bracket accepts lamp/ magnifiers with a 1/2" stud.

MODEL NUMBER

DESCRIPTION
Lamp Mount Bracket



Light Fixtures

FEATURES:

- Durable Light Fixtures feature electronic ballast.
- · White enamel paint finish.
- Includes factory-installed switch and 15 Amp 9' Power Cord.
- Available in 24" and 48" lengths.

ORDERING INFORMATION:

- Mounts to Light Suspension System (sold separately) or beneath Overtable or Fixed Riser Shelves.
- Choose 24" Fixture for shelf lengths less than 48".
- Light Fixtures shipped without tubes.
 Flourescent or LED tubes available upon request.

 MODEL NUMBER
 DESCRIPTION

 3058-02
 48' Two-Tube Light Fixture

 3057-02
 24' Two-Tube Light Fixture





Multi-Adjust Footrest

FEATURES:

- · Ergonomically designed to move in virtually every direction for all-day comfort.
- · Spacious 18" x 12" Footpad is covered with non-slip ribbed rubber matting.
- · Easy to adjust up-down, left-right, back-forward, and to any angle.

ORDERING INFORMATION:

- · May be specified for use on Standard, Heavy-Duty, and Motorized Workstations, which have open-style Leg Sections. Order footrest length to match Table length.
- · Please note that use of Multi-Adjust Footrest on continuous, in-line units requires staggering of horizontal members.

MODEL NUMBER	TABLE LENGTH
N3147	48"
N3148	60-
N3149	72°
3298	Extra footpad*
*Exten funtand for	was on multi-narrow warketstings

"Extra footpad for use on multi-person workstations:



Standard Footrest

FEATURES:

- · Adjusts front-to-back along depth of Lea Section crossmembers.
- Constructed of 18 gauge 2" square furniture grade tubing. Mounting brackets supplied.

ORDERING INFORMATION:

- · May be specified on Standard, Heavy-Duty, and Motorized Workstations, which have open-style Leg Sections.
- · Please consult your Design Specialist for use on Cabinet Workstations or units with Panel Leg Sections.
- · Please order Footrest Length to match Table length.

MODEL NUMBER	TABLE LENGTH	
3147	48"	
3148	60'	
3149	72*	



Solid Uprights

FEATURES:

- · Uprights are designed to accept a variety of Workplace overtable
- · Front is perforated in 3" increments. Uprights bolt directly to rear of Leg Sections.

- · Uprights may be specified for all series Workplace® Leg Sections.
- · Order one upright per Leg Section
- Please note that 9" of length is required to fasten to Heavy-Duty Leg Section. Deduct 7" for other workstations.
- . Uprights may be mounted to rear of Cabinet Workstations.
- If three solid uprights are specified, please order one Center Mounting Bracket per table.
- Stiffener plate recommended for use on stand-alone upright.

MODEL NUMBER	LENGTH/DESCRIPTION
3000-04	48" Solid Upright
3000-05	60" Solid Upright
3000-06	72" Solid Upright
3401	Center Standard Mounting
	Bracket for Heavy-Duty Wkstn
3404	Center Standard Mounting
	Bracket for Standard Wkstn



Safety Shield

FEATURES:

- · All-metal Safety Shield mounts between Solid Uprights.
- · Shield acts as a privacy panel and is especially useful when configuring backto-back table installations.

ORDERING INFORMATION:

- · Specify Safety Shield to match Table
- In-line rows: Please specify model numbers designated for starter/ending and intermediate units of in-line row.

MODEL		
NUMBER	LENGTH	DESCRIPTION
3097	48'L	For stand-alone units
3098	60°L	For stand-alone units
3099	72°L	For stand-alone units
3100	48°L	For starter/ending units of in-line row
3101	48°L	For intermediate units of in-line row
3102	60°L	For starter/ending units of in-line row
3103	60°L	For intermediate units of in-line row
3104	72°L	For starter/ending units of in-line row
3105	72°L	For intermediate units of in-line row



Corkboard Panel

FEATURES:

- Formed metal frame with cork panel mounts between Solid Uprights (sold separately).
- · Corkboard Panel made from quality corkboard material.

ORDERING INFORMATION:

- · Order Panel length to match length of table.
- · Model numbers/sizes shown are sized to fit individual, stand-alone tables only. Please consult your Design Specialist for use on in-line rows.

3461 12" 48" 3463 12" 60" 3465 12" 72"	
0.00	
3465 12" 72"	
3463-50 12" half 60"	
3465-50 12" half 72"	
3462 24" 48"	
3464 24" 60"	
3466 24" 72"	
3464-50 24" half 60"	
3466-50 24" half 72"	



Magnetic Whiteboard Panel

FEATURES:

- · Dual-purpose magnetic whiteboard panel useful for posting procedures, notices, checklists, etc.
- · Mounts between Solid Uprights (sold separately).

ORDERING INFORMATION:

MODEL	HEIGHT	LENGTH	
3450	12"	48"	
3452	12"	60"	
3454	12"	72"	
3452-50	12"	half 60"	
3454-50	12"	half 72"	
3451	24"	48"	
3453	24"	60"	
3455	24"	72"	
3453-50	24"	half 60"	
3453-50	24"	half 72"	



Metal Pegboard Panel

FEATURES:

- · All-metal design available in full or half-length sizes.
- · Mounts to Solid Uprights (sold separately).

MODEL	HEIGHT	LENGTH	
3382	12"	48"	
3384	12"	60"	
3386	12"	72"	
3384-50	12"	half 60"	
3386-50	12"	half 72"	
3383	24"	48"	
3385	24"	60"	
3387	24"	72"	
3385-50	24"	half 60"	
3387-50	24"	half 72"	



20-Amp Shelf (top) and Standard Shelf with Slope Option (bottom)



15-Amp Shelf (top) with Standard Shelf with Slope Option (bottom)



Standard Shell - Undertable position

SHELF SIZE	STANDARD SHELF	DEL NUMBERS 20-AMP SHELF	15-AMP SHELF
12'D x 48'L	N3020	N3026 (2)*	3790 (2)*
12 D x 60 L	N3021	N3027 (3)	3792 (3)
12'D x 60'L Half**	N3021-50	Constructed Assert	-
12'D x 72'L	N3022	N3028 (3)	3794 (3)
12'0 x 72'L Half**	N3022-50		-
18'D x 48'L	N3034	N3037 (2)	3798 (2)
18'D x 60'L	N3035	N3038 (3)	3800 (3)
18'D x 60'L Half	N3035-50		*******
18'D x 72'L	N3036	N3039 (3)	3802 (3)
18 D x 72 L Half	N3036-50	-	Constant

- Indicates quantity of duplex outlets provided.
- " Fits one-half of specified table length.

SHELF BRACKETS MODEL NUMBER 3010-03* 12" Heavy-Duty/Slope Brackets (pair) 3011-03* 18' Heavy-Duty/Slope Brackets (pair) 3083-48 Front Stop for 48'L Shelf 3083-60 Front Stop for 60°L Shelf 3083-60-50 Front Stop for Half 60'L Shelf 3083-72 Front Stop for 72'L Shelf 3083-72-50 Front Stop for Half 72'L Shelf * Heavy-Duty Brackets are dual-purpose. Shelf may be

mounted for use as a flat shelf or as a sloped shelf.

Note: Front Stop provides 2" lip above shelf surface.

Overtable/Undertable Shelf

FEATURES:

- · All-metal construction; flanged 2" on all sides.
- May be used as an adjustable Overtable Shelf (requires Solid Uprights and Shelf Brackets) or as a fixed undertable Shelf (fastens to lower crossmember of open style Leg Sections).
- Prepunched to accept optional Back and End Stops.
- Shelves with 20 Amp electrics are equipped with UL®-approved 20 Amp 125 Volt duplex outlets. Shelves with 15 Amp electrics are equipped with UL®-approved 15 Amp 125 Volt duplex outlets. All shelves with electrical options are equipped with circular knockouts at each end for connection to power. Note: May be hard-wired or requires appropriate Power Cord, sold separately on page 66.

ORDERING INFORMATION:

- Overtable use: specify one pair of Shelf Brackets per Shelf.
- Undertable use: Specify one Kit-33 to mount Shelf to Leg Sections.
- · Please note that undertable Shelf will not fit with Panel Leg Sections or on Cabinet Workstations. Special sizes are available on request.
- · Slope Option: To set Overtable Shelf at a 20-degree slope, specify Heavy-Duty Shelf Brackets plus one Front Stop per Shelf
- · Power Cords are sold separately on page 66.

Cantilever Shelf Assembly

FEATURES:

- · Deep style shelf of all-metal construction; flanged 2" on all sides.
- 22" deep shelf center mounts on Solid Uprights.
- · Shelf may be positioned for use as a
- . flat surface, or at an angle of up to 20 degrees at either front or back.

- Order Shelf length to match table length. Shelf will be approx. 8" shorter than table length.
- · Includes Shelf, mounting brackets. and one front/rear stop with 2" lip. Uprights must be ordered separately.
- · For stand-alone tables only (will not fit on in-line row tables).

MODEL	FOR TABLE LENGTH	DESCRIPTION
3772	48 L	Approx. 40°L Shelf
3774	601	Approx: 52'l. Shelf
3776	72°L	Approx. 64"L Shalf





Back and End Stops

FEATURES:

 All-metal Backstop and tapered End Stops offer all-around protection.

ORDERING INFORMATION:

- Please specify Backstop length to match Table or Shelf length; Endstop length should match depth of Worksurface or Shelf.
- In-Line Rows: Order one Joining Plate to adjoin each set of abutting Backstops.
- Note: Overall height of Backstop/ Endstops is 5" before mounting. Please deduct thickness of selected worksurface (or 2" if mounted on a Shelf) to determine finished overall height.

MODEL NUMBER	DESCRIPTION
3088	48'L Backstop
3089	60'L Backstop
3089-50	For half-shell on 60'L unit
3090	72°L Backstop
3090-50	For half-shell on 72'L unit
3091	Backstop Joining Plate
3092	12'L End Stops (pair)
3093	18'L End Stops (pair)
3094	24°L End Stops (pair)
11095	30'L End Stops (pair)
3096	36'L End Stops (pair)



Fixed Riser Divider Shelf

Adjustable Overtable Divider Shelf

Divider Shelf System

FEATURES:


- Easy-to-move snap-in dividers may be spaced at desired locations along length of Shelf in 1-1/2" increments.
 No fasteners required.
- Top front of Dividers and End Stops feature radius corners for appearance and safety.
- Flexible system allows for unit to be mounted in Solid Uprights for vertical height adjustability, or to be installed on Fixed Riser Panels and fastened directly to worksurface.

ORDERING INFORMATION:

- To specify a Fixed Riser Divider Shelf, please order:
 One Divider Shelf Module
 One pair Fixed Riser Panels
 One Fixed Riser Swaybrace (or one Fixed Riser Safety Shield as shown on page 64)
- To specify an Adjustable Overtable Divider Shelf, please order:
- · One Divider Shelf Module
- · One pair Shelf Brackets
- Two Solid Uprights (page 68)

 Divider Shelf Module includes: One perforated Shelf
 One perforated 8"H Backstop
 One pair 8"H End Stops
 Four 8"H Dividers

MODEL		
NUMBER	SIZE	DESCRIPTION
3633	12'D x 48'L	Divider Shelf Module
3634	12°D x 60°L	Divider Shelf Module
3635	12°D x 72°L	Divider Shelf Module
3634-50	Fits 1/2 of 60°	L unit
3635-50	Fits 1/2 of 72"	Lunit
3250	12°D x 12°H°	Fixed Riser Panels
3251	12°D x 18°H°	Fixed Riser Panels
3252	12'D x 24'H'	Fixed Riser Panels
3088	48°L	Fixed Riser Swaybrace
3089	60°L	Fixed Riser Swaybrace
3090	72°L	Fixed Riser Swaybrace
3625	8'H x 12'D	Dividers (set of 4)
3010-03	12'0	Heavy-Duty Shelf Bkts (pair
- Water Comment		Carlotte Co.



Wire Divider Shelf System

FEATURES:

- Efficient, practical way to keep larger items organized and in check. Perfect for storage of shipping containers and materials.
- Perforated shelves feature divider spacing in approximately 3" increments. Threaded metal (plated) dividers are fastened securely with nuts on underside of shelf.
- Shelves are mounted to Solid Uprights (sold separately on page 68) with the use of the Heavy Duty Shelf Brackets shown below. Shelf Brackets may also be inverted to mount Shelf at a 20° slope (as shown in photo).

ORDERING INFORMATION:

- Order one pair of Heavy-Duty Shelf Brackets for each Shelf.
- Dividers are ordered separately.
- Front Stop must be purchased if Shelf is to be installed at 20° slope.

MODEL NUMBER	DESCRIPTION
3703	12"D x 48'L Wire Divider Shelf
3704	12"D x 60'L Wire Divider Shelf
3705	12"D x 72"L Wire Divider Shelf
3713	18"D x 48"L Wire Divider Shelf
3714	18"D x 60"L Wire Divider Shelf
3715	18"D x 72"L Wire Divider Shelf
3725-12	12"D Wire Dividers (set of 4)
3725-18	18"D Wire Dividers (set of 4)
3010-03	12"D Heavy Duty/Slope Shelf
	Brackets (pair)
3011-03	18"D Heavy Duty/Slope Shelf
	Brackets (pair)
3083-48	Front Stop* for 48'L Slope Shelf
3083-60	Front Stop* for 60'L Slope Shelf
3083-72	Front Stop* for 72*L Slope Shelf



- Mounting Rails are fabricated of metal and accept any size bin.
 Bins may be hung at the front or at the rear of the rail. Rails mount to Solid Uprights, but may also be fastened within the Standard Fixed Riser Assembly with #3347 brackets.
- Options include a Slope Kit which positions rail at a 20-degree angle. on Extender Kit, which brings rail closer to operator on deeper tables.




Shown with optional Extender Kit

ORDERING INFORMATION:

- Specify Mounting Rail length to match length of table.
- For heavy loads, a third (center) Solid Upright is recommended.
- For in-line rows, please specify one #3348 Joining Bracket for each set of adjoining Mounting Rails.

MODEL		
NUMBER	DESCRIPTION	
3342	For 48'L Table	
3343	For 60'L Table	
3343-50	For half of 60°L Table	
3344	For 72°L Table	
3344-50	For half of 72°L Table	
3307	Extender Kit (for 2 Uprights)	
3308	Extender Kit (for 3 Uprights)	
3347	Fixed Riser Mounting Kit	
3348	In-Line Joining Bracket	
3349	Slope Option Kit	



Louvered Bin Panel

FEATURES:

 All-metal construction available in full or half-length sizes.



Louvered Bin Panel Close-up

ORDERING INFORMATION:

MODEL NUMBER	LENGTH	DESCRIPTION
3471	48"L	12"H x 48"L Bin Panel
3473	60"L	12"H x 60"L Bin Panel
3473-50	60"L(Half)	12"H x half-length Bin Panel
3475	72"L	12"H x 72"L Bin Panel
3475-50	72"L(Half)	12"H x half-length Bin Panel



Articulating Bin Rack

FEATURES:

- Allows small parts, hardware, etc. to be positioned in most convenient location.
- Swings away from, or towards operator easily with double pivot design.

ORDERING INFORMATION:

MODEL NUMBER	DESCRIPTION	
3580	Articulating Bin Rack	
3590	Extra arm for additional	
	extension capability	

* Provides 2" height above Shell.



Shown with optional Light Transition Bracket and balancer



Tool Trolley System

FEATURES:

- · Keeps tools off the worksurface, yet within easy reach. Helps eliminate tool damage due to accidental droppage.
- Adjustment features include vertical adjustment along length of Solid Uprights plus horizontal adjustment from front to rear of Table.
- Four-wheel trolleys sold separately. Optional Transition Bracket allows Light Fixture (sold separately) to be mounted to the Tool Trolley system.

ORDERING INFORMATION:

- · Tool balancers, air-lines, and tools not included.
- · Requires Solid Uprights, sold separately on page 68.
- · Order Tool Trolley System same depth and length of Table.
- · 4-wheel Tool Trolleys sold separately.
- · Optional Transition Bracket to accept Light Fixture: Specify Transition Bracket length to match length of Tool Trolley.
- · For in-line use: Please specify one #32020 Bracket for each set of adjoining Tool Trolleys.

MODEL NUMBER	SIZE	DESCRIPTION			
3425	24'D x 48'L	Tool Trolley System			
3426	24°D x 60°L	Tool Trolley System			
3427	24°D x 72°L	Tool Trolley System			
3430	30°D x 48°L	Tool Trolley System			
3431	30°D x 60°L	Tool Trolley System			
3432	30°D x 72°L	Tool Trolley System			
3435	36°D x 48°L	Tool Trolley System			
3436	36°D x 60°L	Tool Trolley System			
3437	36°D x 72°L	Tool Trolley System			
3441	4-Wheel Trolle	у			
3445	Transition Bracket for 48°L Tool Trolley				
3446		cket for 60°L Tool			
	Trolley				
3447	Transition Bra	cket for 72°L Tool			
	Trolley				
32020	Transition Bracket for adjoining in-line Tool Trolleys				



Paper Roll Holder/Cutter

FEATURES:

- Fits half-length of 72" unit only.
- · All-steel holder/cutter mounts to Solid Uprights.
- · Equipped with floating tear-off cutter of heavy guage steel.
- · Holds one roll of paper having a 1" core, up to 30" wide.

ORDERING INFORMATION:

 Requires at least two Solid Uprights plus Center Standard Mounting Bracket (sold separately—see p. 68) for installation.

MODEL NUMBER	DESCRIPTION
3786-50	Paper Roll Holder/Cutter for one-half of 72'L unit



Articulating Tray

FEATURES:

- · Keeps tools, parts, and equipment off the worksurface, yet within easy reach.
- . Tray is 18"L x 12"D with 1" flange around all sides of worksurface and includes a foam pad insert.

ORDERING INFORMATION:

MODEL NUMBER	DESCRIPTION
3595	Articulating Bin Rack
3590	Extra arm for additional
	extension capability



Wirespool Holder

FEATURES:

· Keeps wire and other spooled materials organized and within arm's reach.

- · Requires Solid Uprights, sold separately on page 68.
- · Full-Length Rods for tables over 48"L require 3 Solid Uprights.
- Call for assistance with in-line row use.
- · Wirespool Holder includes 3/4" diameter rod (painted) and 2 (or 3) mounting brackets.

MODEL NUMBER	LENGTH	DESCRIPTION	
3047-01	48"	Full-Length Rod	
3048-01	60"	Full-Length Rod	
3048-50	60-	Half-Length Rod	
3049-01	72"	Full-Length Rod	
3049-50	72"	Half-Length Rod	



Rubber Bumpers

FEATURES:

· Heavy-duty Rubber Bumpers are highly recommended on mobile units to protect worksurface corners, walls, and other objects that mobile unit may come into contact with during travel.

ORDERING INFORMATION:

- · Rubber Bumpers are sold individually.
- Rubber Bumpers may not be installed at rear corners of any table equipped with Solid Uprights, on front corners of post-formed tops, or on epoxy resin
- · Installation of Rubber Bumper requires drilling into worksurface.

MODEL NUMBER DESCRIPTION

3140-B

Black Heavy-Duty Rubber Bumper



Rubber Boots

FEATURES:

- Boot slips over base of Leg Section to enhance table appearance.
- · Floor cleaning is made easier by eliminating the need to clean around leg levellers. Base of boot is open to eliminate interference with leveling function.

ORDERING INFORMATION:

- · May be specified for use on Standard, Heavy-Duty, or Corner Workstation Leg Sections.
- · Boots are sold individually. Please order two per Leg Section.

MODEL NUMBER

DESCRIPTION Rubber Boot



Hanging Waste Container

FEATURES:

- . Heavy-duty plastic construction for easy cleaning.
- · Keeps container off floor surface for ease of floor maintenance.
- Container is 11-5/8"L x 8-1/4"W x 12-1/2"H

ORDERING INFORMATION:

- · May be specified for use on Tables equipped with open style Heavy-Duty Leg Sections.
- · May be hung from outside or inside of Leg Section.
- Wastebasket available in beige color only.

MODEL NUMBER

DESCRIPTION

Hanging Waste Container



Mini Corner Guards

- · Suitable for use on metal worksurface corners, and will fit many items, such as Undertable Shelves, worksurfaces, drawer cases, etc.
- Adhesive mounting material NOT included.

ORDERING INFORMATION:

· 2-1/4" X 2-1/4"

MODEL NUMBER

3140-M-4 3140-M-12 Mini Corner Guard 4-Pack

Mini Corner Guard 12-Pack



Leg Levellers

FEATURES:

 Provide 3/4" + or – of vertical levelling adjustment, Levellers are equipped with a 1/2" x 13 x 2-1/2" thread.

- Standard Leg Levellers are provided with all Workplace® Leg Sections.
- · Vibration-Absorbing Leg Levellers are equipped with extra-thick waffled base pad to help reduce effects of vibration.
- · Lag-To-Floor Levellers feature a rectangular metal base plate with pre-drilled holes to allow table to be bolted to floor.

ORDERING INFORMATION:

· Leg Levellers sold individually. Please order two per Leg Section.

MODEL NUMBER	DESCRIPTION
1143	Standard Leveller
1144	Vibration-Absorbing Leveller
1145	Lag-To-Floor Leveller



Document Holder

FEATURES:


- · Positions documents in the most convenient location. Swivels away from or towards operator easily with double pivot design. Spacious 11 x 17 holder is equipped with two spring clips.
- · Mounts to Solid Upright (sold separately).


ORDERING INFORMATION:

MODEL NUMBER DESCRIPTION 3585 Document Holder Articulating Arm 3590 Extra arm for additional extension capability

example configurations







OVERTABLE ACCESSORIES

OT1 Wire Divider Shelf System p.72	OT2 Solid p.68	OT3 Light Suspen- sion System p.67	OT4 Safety p.69
0T5 Bin Rail <i>p.72</i>	OT6 Overtable p.70	0T7 Back & End p.71 Stops	OT8 Panel Riser p.63
OT9 Tool Trolley p.73	OT10 Pegboard/ p.69	OT11 Divider Shelf System <i>p.71</i>	OT12 Cantilever p.70

UNDERTABLE ACCESSORIES

UT1 Wire Divider p.72 Shelf System p.72	UT2 Undertable p.70 Shelf	UT3 Storage p.60	UT4 Standard p.68
UT5 Multi-Adjust p.68	UT6 Personal p.61	UT7 Divider Shelf System p.71	UT8 Hanging Waste p.74 Container

COMPUTER-RELATED ACCESSORIES

C1	Articulating p.62 Monitor Arms	C2	CPU Caddy	p.63	C3	Keyboard Tray	p.63	C4	Laptop Tray	p.62
----	--------------------------------	----	--------------	------	----	------------------	------	----	----------------	------

GENERAL ACCESSORIES

G1	Paper Roll Cutter/ Holder <i>p.73</i>	G2	Document Holder	p.74	G3	Lamp Bracket	p.67	G4	15/20 Amp Powerstrip	p.65
G5	Airtrough p.66	G6 F	Rubber Bumpers Mini Comer Guard	<i>p.74</i> ds	G7	20-amp Powertrough	p.65	G8	Articulating Bin Rack	p.72
 G9	Leg p.74	G 10	Rubber Boots	p.74	G11	Spool Holder	p.73	G12	Articulating Tray	p.73

NOTE: This table is NOT a complete listing of all available accessories shown on pages 60 - 74.

These are just a few examples illustrating how Workplace® workstations may be custom configured using the wide array of available Add-On Accessories shown on pages 60 to 74.



Durable

Solid welded tubeframe construction, heavy duty bracing, and worksurfaces that take abuse ensure every Workplace product outlasts even the toughest applications.



Ergonomic

Whether it's manually or motorized height-adjustable, correct ergonomics is the number one design objective of every Workplace product we build.



Mobile

Ever-changing task requirements demand wheeled mobility. Every workstation model we build may be made mobile without compromising its strength or load capacity.



Workplace products work together in a virtually infinite Configurable variety of ways. Why be constrained to the limitations of a catalog when a perfect solution can be configured to order?



Versatile

Choose from a wide range of accessories to maximize productivty: lighting, footrests, tool holders, shelving, power, and computer peripherals. Just to name a few.

...Experience matters."

Workplace Modular Systems LLC

562 Mammoth Road Londonderry, NH 03053-2117

Phone: 800.258.9700 Web: workplacenh.com

Email: info@workplacenh.com

© 2016 Workplace Modular Systems LLC Printed in USA