
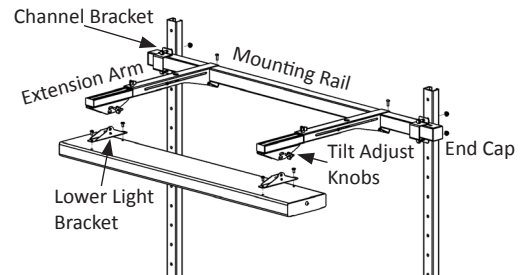


LIGHT FIXTURES, SUSPENSION SYSTEM, TOOL TROLLEY OR SHELF: Do not remove components from cartons prior to assembly. Use the packing list to locate components. Keep hardware kits in labeled packaging until ready to use.

ASSEMBLY TIPS

- Fasten Solid Uprights to rear of leg sections using KIT-08.
- Extension arms and light brackets are pre-assembled, including hardware on Suspension System.
- Light fixture depth may be adjusted using the knobs on extension arms.
- Use the tilt adjust knobs on upper light brackets to set light angle.
- Fasten the Light Fixture to the Transition Bracket, using KIT-39, before assembling the Tool Trolley.
- It is helpful to have two people for mounting the light fixture.



LIGHT SUSPENSION SYSTEM: Fasten mounting tube to Uprights with channel brackets using KIT-41. Remove the lower light bracket from extension arm assembly; use KIT-39 to fasten to the Light Fixture. Remove the 1/4-20 Screw and Nuts from extension arms in order to mount to mounting tube (36" apart). Refasten hardware - hand tighten only. Hook light fixture onto extension arms, fasten by rethreading the tilt adjust knobs. Tighten hardware and press End Caps into open ends of the mounting rail.

HARDWARE INCLUDED

KIT-41



Mounting Clips (2)
1/4-20 x 1/2 Cup Point Alloy Screw (2)
1/8" Hex Key (1)

KIT-39



1/4 x 1/2" Pan Head Screw (4)

KIT-72

5/16-18x3/4" HHCS (4)
5/16" Flat Washers (8)
Tool Rail Anchor Nuts (4)
5/16" Lock Washers (4)

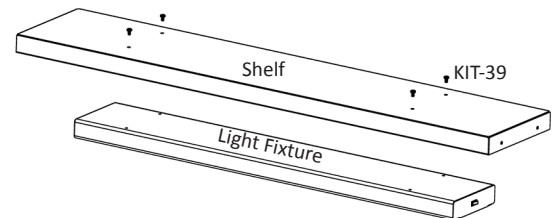

UNDER A SHELF: Align the pre-drilled holes in top of Light Fixture with those on underside of Shelf. Fasten using KIT-39.

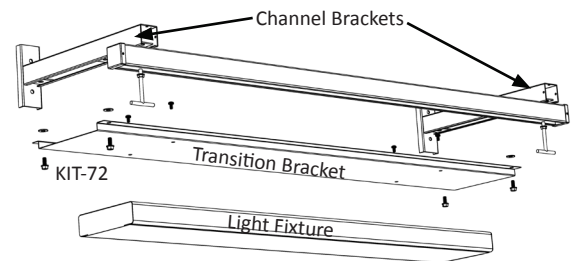

TRANSITION BRACKET/LIGHT TO TOOL RAIL SYSTEM: Fasten Light Fixture to transition bracket using KIT-39. Insert two of the anchor nuts (KIT-72) into open end of each channel bracket, then fasten the transition bracket/light to the channel brackets using remaining KIT-72 hardware.