

DRAWERS, PULL-OUT SHELVES & PERSONAL LOCKERS: Do not remove components from cartons prior to assembly. Use the packing list to locate components. Keep hardware kits in labeled packaging until ready to use.

ASSEMBLY TIPS

- Drawers, Pull-Out Shelves and Personal Lockers may be mounted with the worksurface assembled, except on Heavy-Duty units where mounting brackets must be positioned on Frame before the worksurface mounting.
- Remove Drawers from case before attaching Case to Frame.
- Snap-in Nuts found in the top of Drawer Case should be removed and discarded.

DRAWER TIPS



- To remove Drawers: to disconnect drawer slide from case, push one lever, found in back of slide up and the other down.
- To insert Drawers: applying some pressure, slide back into case. **DO NOT FORCE** drawer.
- Drawers will be stiff upon initial assembly. Open and close numerous times to loosen up the slides.





HARDWARE INCLUDED

KIT-09A


- 1/4-20 x 1/2" RHMS (4)
- 1/4" Flat Washers (4)

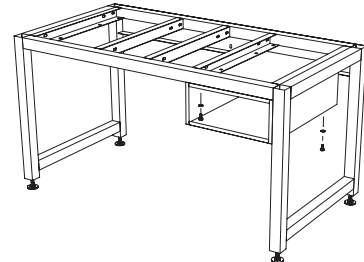



ON A STANDARD* WORKSTATION: Align holes in top of Drawer Case or Pull-Out Shelf with snap-in nuts in Frame channel, fasten using KIT-09A.

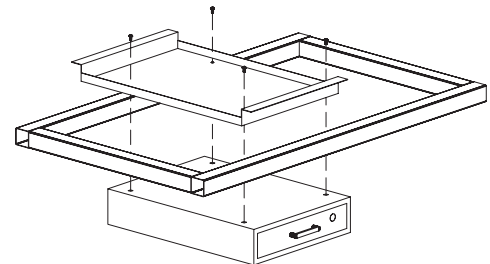

ON A HEAVY-DUTY WORKSTATION:** Hang Bracket from Frame. Fasten Drawer Case or Pull-Out Shelf to the Bracket using KIT-09A.

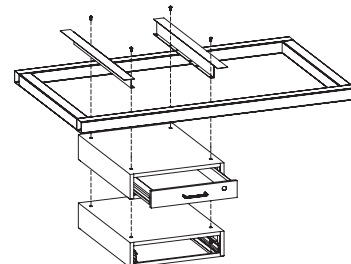

TIERRING DRAWERS/PULL-OUT SHELF: Align additional Drawer or Pull-Out Shelf Case with holes in mounted case, fasten down through upper case using KIT-09A.



PERSONAL LOCKER: Attach Bracket to Frame using hardware from KIT-09A. Using the holes in Bracket, fasten locker using KIT-09A.

*Standard frames have channels installed in framework for accessory mounting.

**On Heavy-Duty Tables, Drawers must be positioned 7" from end of Frame.